

Application	Uninterrupted
Thermal Current Rating (I <sub>th</sub> )	200A
Intermittent Current Rating:	
30% Duty	365A
40% Duty	315A
50% Duty	285A
60% Duty	260A
70% Duty	240A
Rated Fault Current Breaking Capacity (I <sub>cn</sub> ) 5ms Time Constant: (in accordance with UL583*)	
RW190	300A at 96V
RW190B	300A at 120V
Maximum Recommended Contact Voltages (U <sub>e</sub> ):	
RW190	96V D.C.
RW190B	250V D.C.
Typical Voltage Drop per pole across New Contacts at 200A:	
Normally Open	40mV
Mechanical M.T.B.F	>5 x 10 <sup>6</sup>
Coil Voltage Available (U <sub>s</sub> ) (Rectifier board required for A.C.)	From 6 to 240V D.C.
Coil Power Dissipation:	
Highly Intermittent Rated Types	40 - 50 Watts
Intermittently Rated types	30 - 40 Watts
Prolonged Rated Types	15 - 30 Watts
Continuously Rated Types	10 - 15 Watts
Maximum Pull-In Voltage (Coil at 20° C) Guideline:	
Highly Intermittent Rated types (Max 25% Duty Cycle)	60% U <sub>s</sub>
Intermittently Rated types (Max 70% Duty Cycle)	60% U <sub>s</sub>
Prolonged Operation (Max 90% Duty Cycle)	60% U <sub>s</sub>
Continuously Rated Types (100% Duty Cycle)	66% U <sub>s</sub>
Drop-Out Voltage Range	10 - 30% U <sub>s</sub>
Typical Pull-In Time (N/O Contacts to Close):	30ms
Typical Drop-Out Time (N/O Contacts to Open):	
Without Suppression	8ms
With Diode Suppression	60ms
With Diode and Resistor (Subject to resistance value)	25ms
Typical Contact Bounce Period	3ms
Operating Ambient Temperature	- 40° C to + 60° C
Guideline Contactor Weight:	
RW190	760 gms
With Auxiliary	+ 20 gms
With Blowouts	+ 50 gms
<b>Auxiliary Details</b>	
Auxiliary Thermal Current Rating	5A
<b>Auxiliary Contact Switching Capabilities (Resistive Load):</b>	
RW190C	RW190A
	5A at 24V D.C.
	2A at 48V D.C.
	0.5A at 240V D.C.
<b>Advised Connection Sizes for Maximum Continuous Current</b>	
Copper busbar	130mm <sup>2</sup> [0.20inch <sup>2</sup> ]
Cable	Rated suitable for Application

Key: ▲ = Uninterrupted

Note: Where applicable values shown are at 20° C

\* Please check our web site for product UL status

- Performance data provided should be used as a guide only. Some de-rating or variation from figures may be necessary according to application.
- Thermal current ratings stated are dependant upon the size of conductor being used
- For further technical advice email: [technical@albrightinternational.com](mailto:technical@albrightinternational.com)
- Albright reserve the right to change data without prior notice


The Reduced Silver series are suitable for applications where infrequent switching is specified. In such applications the degradation of the tip is minimal and therefore a higher volume of silver is unnecessary. Developed for Uninterrupted current applications the RW190 is typically used in line contactors and Power Distribution Systems.

- Uninterrupted current - no or infrequent load switching requirements (maintains a lower contact resistance).


The RW190 features double breaking main contacts with silver alloy tips, which are weld resistant, hard wearing and have excellent conductivity. The RW190 has M8 stud main terminals and 6.3mm spade coil connections. It can be mounted via M5 tapped holes or mounting brackets; either supplied fitted, or as separate items. Mounting can be horizontal or vertical, when vertical the M8 contact studs should point upwards. If the requirement is for downwards orientation we can adjust the contactor to compensate for this.



RW190

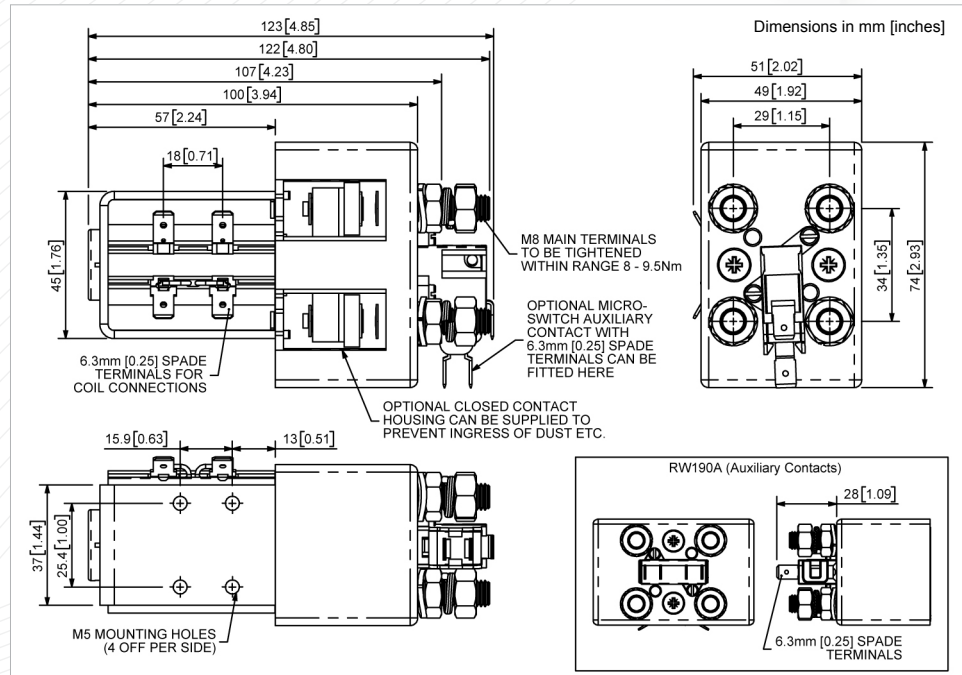

**RW190 Contactor Performance**

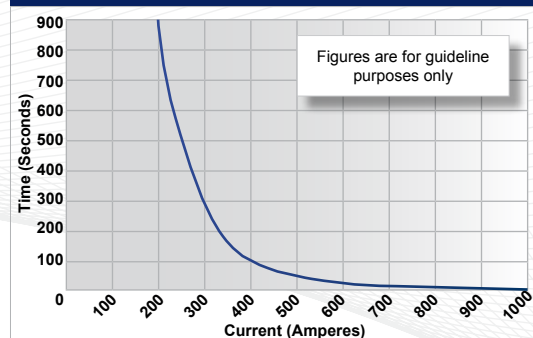

Contact Performance Key:  
— Uninterrupted Current

**RW190 Available Options**

General	Suffix
Auxiliary Contacts	○ A
Auxiliary Contacts - V3	○ C
Magnetic Blowouts†	○ B
Magnetic Blowouts - High Powered†	○ B
Armature Cap	●
Mounting Brackets (See Stud Series Catalogue)	○
Magnetic Latching† (Not fail safe)	○ M
Closed Contact Housing‡	○
Environmentally Protected IP66	X
EE Type (Steel Shroud)	○ EE
<b>Contacts</b>	
Textured Tips	○ T
Silver Plating	X
<b>Coil</b>	
AC Rectifier Board (Fitted)	○
Coil Suppression†	○
Flying Leads	○ F
Manual Override Operation	○
M4 Stud Terminals	X
M5 Terminal Board	○
Vacuum Impregnation	○

Key: ○ Optional ○ Standard ● Not Available X  
† Connections become polarity sensitive  
‡ Open Housing Available

**Connection Diagram**

