

Application	Interrupted Uninterrupted	d
Thermal Current Rating (Ith)	100A	7
ntermittent Current Rating:		Ī
30% Duty	185A	2
10% Duty	160A	7
50% Duty	140A	7
60% Duty	130A	
70% Duty	120A	
Rated Fault Current Breaking Capa in accordance with UL583*)		
SW85	800A at 48V	2
SW85B	800A at 80V	7
Rated Fault Current Breaking Capa (in accordance with UL508*)	acity ([/] cn) Resistive Load:	
SW85	150A at 48V D.C.	4
SW85B	150A at 96V D.C.	Z
Maximum Recommended Contact	Voltages (U _e):	
SW85	48V D.C.	
SW85B	96V D.C.	7
Typical Voltage Drop per pole across New Contacts at 100A	50mV	
Mechanical Durability	>5 x 10 ⁶ Cycles	4
Coil Voltage Available (U _S) (Rectifier board required for A.C.)	From 6 to 240V D.C.	
Coil Power Dissipation:	7	
Highly Intermittent Rated Types	20 - 30 Watts	4
ntermittently Rated types	15 - 20 Watts	4
Prolonged Rated Types	13 - 15 Watts	Z
Continuously Rated Types	7 - 13 Watts	4
Maximum Pull-In Voltage (Coil at 2)	0° C) Guideline:	
Highly Intermittent Rated types (Max 25% Duty Cycle)	60% U _S	_
ntermittently Rated types Max 70% Duty Cycle) Prolonged Operation	60% U _S	_
Max 90% Duty Cycle) Continuously Rated Types	60% U _S	4
100% Duty Cycle) Drop-Out Voltage Range	10 - 25% U _S	4
Typical Pull-In Time	20ms	
Typical Drop-Out Time (N/O Contac		4
	5ms	
Nithout Suppression		4
With Diode Suppression	50ms	4
Nith Diode and Resistor (Subject to resistance value)	8 - 20ms	2
Typical Contact Bounce Period	3ms	2
Operating Ambient Temperature	- 40°C to + 60°C	
Guideline Contactor Weight:		
SW85	360 gms	
With Auxiliary	+ 20 gms	
Nith Blowouts	+ 50 gms	
Auxiliary	•	
Auxiliary Thermal Current Rating	5A	Z
Auxiliary Contact Switching Cap	abilities (Resistive Load):	
SW85A	SW85C	
5A at 24	V D.C.	
2A at 48	V D.C.	
0.5A at 24	10V D.C.	
Advised Connection Sizes for Ma		
Jopper Dusbar	Rated suitable for Application	4
Cable	 Rated Sullable for Application 	
Cable Key: = Interrupted = Unit		

The SW85 has been designed for direct current loads, particularly motors as used on electric vehicles such as industrial trucks. Developed for both interrupted and uninterrupted loads, the SW85 is suitable for switching Resistive, Capacitive and Inductive loads.


- Interrupted current opening and closing on load with frequent switching (results in increased contact resistance).
- Uninterrupted current no or infrequent load switching requirements (maintains a lower contact resistance).

The SW85 features single pole double breaking main contacts with silver alloy tips, which are weld resistant, hard wearing and have excellent conductivity. The SW85 has M8 stud main terminals and 6.3mm spade coil connections. Mounting is via M4 tapped holes or mounting brackets, either supplied fitted, or as separate items. Mounting can be horizontal or vertical, when vertical the M8 contact studs should point downwards. If the requirement is for upwards orientation we can adjust the contactor to compensate for this. Please note Normally Closed contacts are not suited to make and break load.





SW85

- 6.3mm [0.25] SPADE TERMINALS

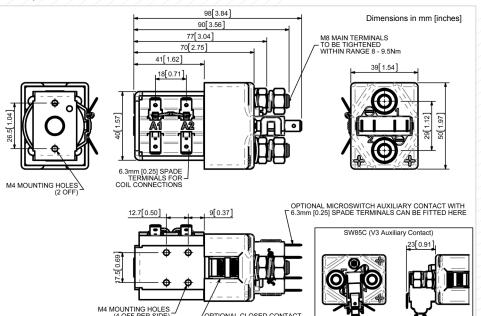

HOUSING CAN BE SUPPLIED TO PREVENT INGRESS OF DUST ETC

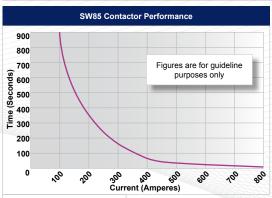



SW85 Available Options				
General		Suffix		
Auxiliary Contacts	0	Α		
Auxiliary Contacts - V3	0	С		
Magnetic Blowouts†	0	В		
Magnetic Blowouts - High Powered [†]	0	В		
Armature Cap	X			
Mounting Brackets (See Stud Series Catalogue)	0			
Magnetic Latching [†] (Not fail safe)	0	М		
Closed Contact Housing [‡]	0			
Environmentally Protected IP66 (see SW85P Catalogue sheet)	0	Р		
EE Type (Steel Shroud)	0	EE		
Contacts				
Large Tips	0	L		
Textured Tips	0	T		
Silver Plating	X			
Coil				
AC Rectifier Board (Fitted)	0			
Coil Suppression [†]	0			
Flying Leads	0	F		
Manual Override Operation	X			
M4 Stud Terminals	Х			
M5 Terminal Board	0			
Vacuum Impregnation	0			
Key: Optional ○ Standard ●	Not Availa	ble X		
† Connections become polarity sensitive				

[‡] Open Housing Available

- Performance data provided should be used as a guide only. Some de-rating or variation from figures may be necessary according to application.
- Thermal current ratings stated are dependant upon the size of conductor being used
- For further technical advice email: technical@albrightinternational.com
- Albright reserve the right to change data without prior notice

