

Application	Interrupted	Uninterrupted
Thermal Current Rating (th)	▶	80A
Intermittent Current Rating:		
30% Duty	▶	145A
40% Duty	▶	125A
50% Duty	▶	115A
60% Duty	▶	105A
70% Duty	▶	95A
Rated Fault Current Breaking Capacity (^{cn}) 5ms Time Constant: (in accordance with UL583*)		
PC61	▶	400A at 48V D.C. §
PC61B	▶	400A at 96V D.C. §
Rated Fault Current Breaking Capacity (^{cn}) Resistive Load: (in accordance with UL508*)		
PC61	▶	120A at 48V D.C. §
PC61B	▶	120A at 96V D.C. §
Maximum Recommended Contact Voltages (U ₀):		
PC61	▶	48V D.C. 60V D.C.
PC61B	▶	96V D.C. 120V D.C.
Typical Voltage Drop per pole across New Contacts at 80A	▶	<40mV
Mechanical M.T.B.F	▶	>3 x 10 ⁶
Coil Voltage Available (U _s) (Rectifier board required for A.C.)	▶	From 6 to 130V D.C.
Coil Power Dissipation:		
Highly Intermittent Rated Types	▶	14 - 21 Watts
Intermittently Rated types	▶	10 - 14 Watts
Prolonged Rated Types	▶	7 - 10 Watts
Continuously Rated Types	▶	5 - 7 Watts
Maximum Pull-In Voltage (Coil at 20° C) Guideline:		
Highly Intermittent Rated types (Max 25% Duty Cycle)	▶	60% U _s
Intermittently Rated types (Max 70% Duty Cycle)	▶	60% U _s
Prolonged Operation (Max 90% Duty Cycle)	▶	60% U _s
Continuously Rated Types (100% Duty Cycle)	▶	66% U _s
Drop-Out Voltage Range	▶	10 - 25% U _s
Typical Pull-In Time	▶	15ms
Typical Drop-Out Time (N/O Contacts to Open):		
Without Suppression	▶	6ms
With Diode Suppression	▶	35ms
With Diode and Resistor (Subject to resistance value)	▶	8 - 20ms
Typical Contact Bounce Period	▶	3ms
Operating Ambient Temperature	▶	- 40° C to + 60° C
Guideline Contactor Weight:		
PC61	▶	190 gms
With Auxiliary	▶	+ 20 gms
With Blowouts	▶	+ 8 gms

Auxiliary Details	
Auxiliary Thermal Current Rating	▶ 5A

Auxiliary Contact Switching Capabilities (Resistive Load):	
	▶ 5A at 24V D.C.
	▶ 1A at 60V D.C.
	▶ 0.5A at 120V D.C.
	▶ 0.25A at 240V D.C.

Advised Connection Sizes for Maximum Continuous Current

Circuit Board Tracks ▶ Rated suitable for Application

Key: ▶ = Interrupted ▲ = Uninterrupted

Note: Where applicable values shown are at 20° C

* Please check our web site for product UL status


§ Normally Open contacts only - Normally Closed contacts are not designed to make and break current

- Performance data provided should be used as a guide only. Some de-rating or variation from figures may be necessary according to application.
- Thermal current ratings stated are dependant upon the size of conductor being used
- For further technical advice email: technical@albrightinternational.com
- Albright reserve the right to change data without prior notice


The PC61 is a miniature series single pole double throw contactor designed for printed circuit board mounting. Devised for both interrupted and uninterrupted loads, the PC61 is suitable for switching Resistive, Capacitive and Inductive loads. Typical applications include Telecommunication, UPS and other power conversion systems.

- **Interrupted** current - opening and closing on load with frequent switching (results in increased contact resistance).
- **Uninterrupted** current - no or infrequent load switching requirements (maintains a lower contact resistance).

The PC61 features single pole double breaking main contacts with silver alloy tips, which are weld resistant, hard wearing and have excellent conductivity. The PC61 can be secured to the printed circuit board by means of an M4 bolt. **Note:** The PC range now incorporates the mounting board option, previously assigned to the MB range (existing MB part numbers remain valid).

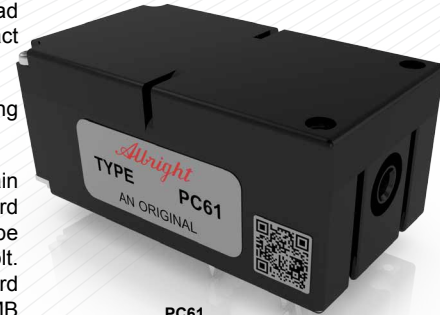


PC61

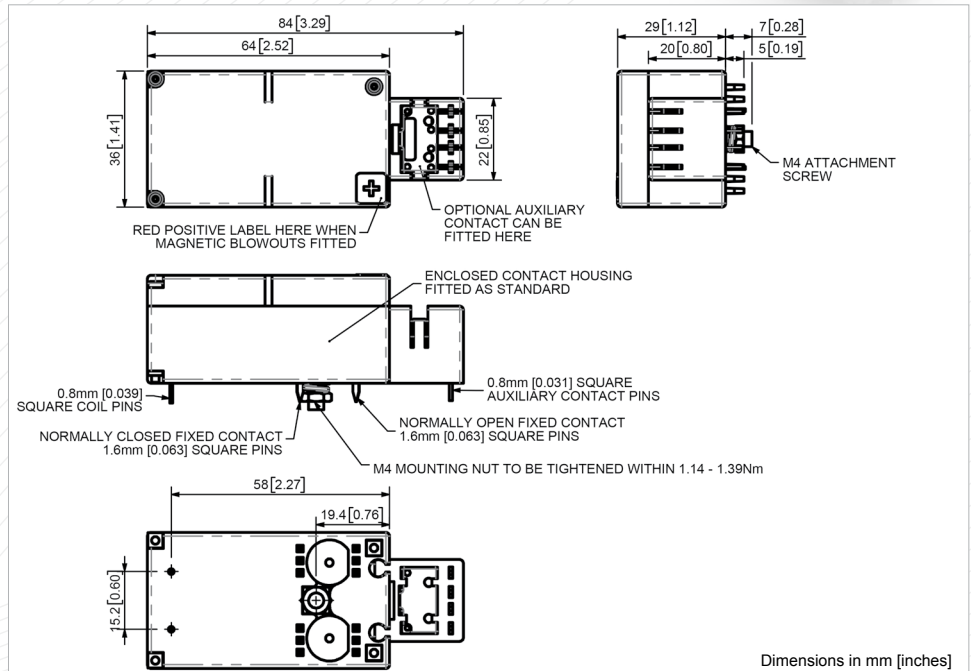

Dimensions in mm [inches]

PC61 Contactor Performance

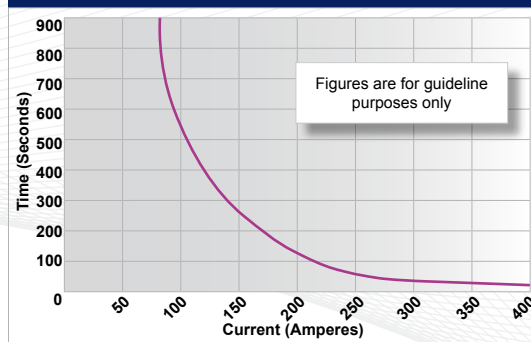

Contact Performance Key:

— Interrupted & Uninterrupted Current

PC61 Available Options


General		Suffix
Auxiliary Contacts	○	A
Auxiliary Contacts - V4	X	
Magnetic Blowouts†	○	B
Magnetic Blowouts - High Powered†	X	
Armature Cap	X	
Mounting Brackets	X	
Magnetic Latching‡ (Not fail safe)	○	M
Closed Contact Housing‡	○	
Environmentally Protected IP66§	○	P
EE Type (Steel Shroud)	X	
Contacts		
Large Tips	X	
Textured Tips	X	
Silver Plating	X	
Washable	○	W
Coil		
AC Rectifier Board (Fitted)	X	
Coil Suppression†	X	
Flying Leads	X	
Manual Override Operation	X	
M4 Stud Terminals	X	
M5 Terminal Board	X	
Vacuum Impregnation	X	

Key: Optional ○ Standard ● Not Available X

† Connections become polarity sensitive


‡ Enclosed top cover standard when blowouts not fitted

§ Not Suitable with Mounting Base

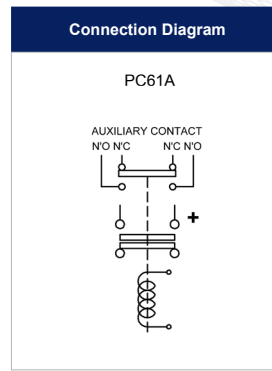


Mounting Boards

All configurations of the PC61 can be supplied with an optional separate mounting base which can be soldered to the circuit board. After soldering and washing the printed circuit board, the PC contactor can be plugged into the base and secured by means of an M4 nut on the underside of the board. Removal for servicing or replacement is possible by removal of the nut and unplugging the PC contactor from the base.

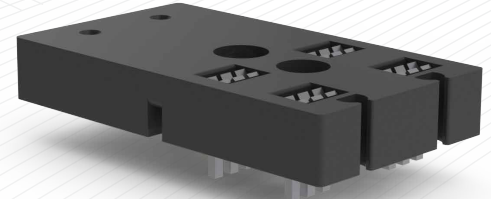


PC61 Mounting Base

PC61 with Mounting Base Drawing

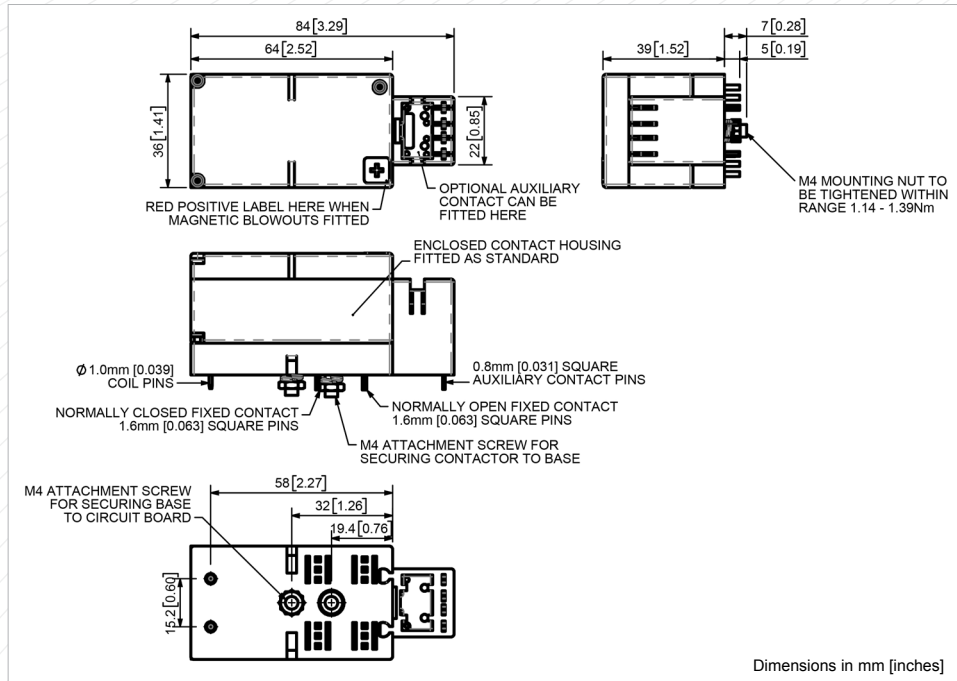

Washable Contactors and Auxiliary Contacts (PC61AW)

Normally the auxiliary contacts are supplied already fitted to the contactor. However, if the printed circuit boards are to be washed after soldering, the auxiliary contact is supplied separately and the contactor is temporarily sealed with a rubber plug. After washing this is removed and the auxiliary contact can then be fitted.



PC61 showing Temporary Rubber Plug

Note: The PC61AW contactors (with or without optional mounting board) are not therefore fully protected against the environment to the same degree as the PC61P.




PC61 on Mounting Base

Installation


To accommodate the PC Contactors, printed circuit boards should be drilled in accordance with the mounting details opposite. Prior to soldering, the PC61 can be secured to the circuit board by means of a M4 bolt which protrudes from the underside of the contactor.

If the full current ratings of the contactors are to be utilised, circuit board tracks should have the appropriate thickness and width of copper. Conventional hand or wave soldering techniques can be used.

Mounting Detail

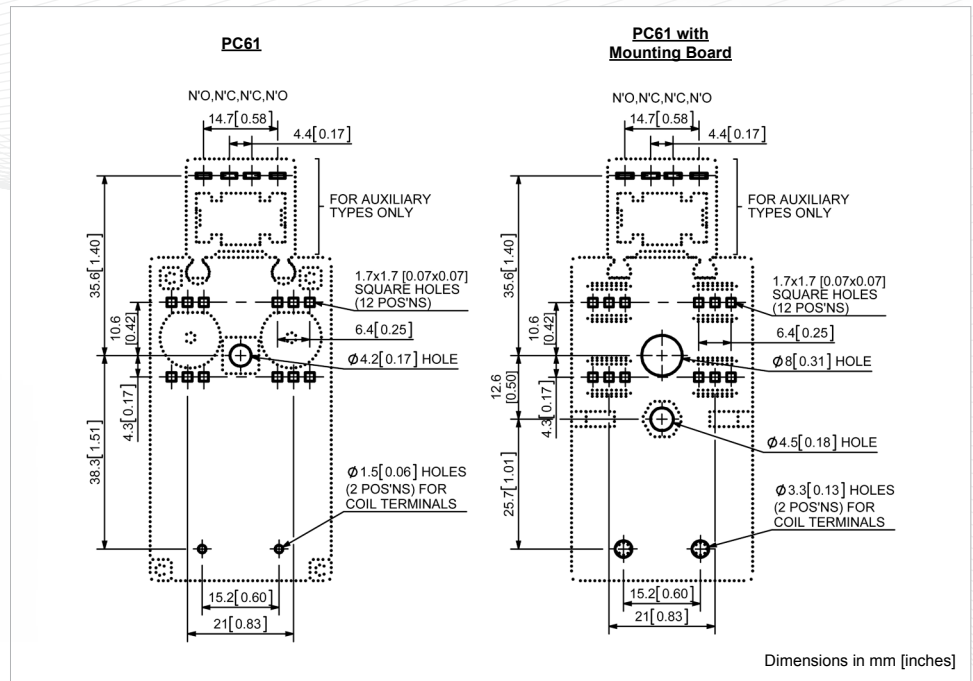

Dimensions in mm [inches]

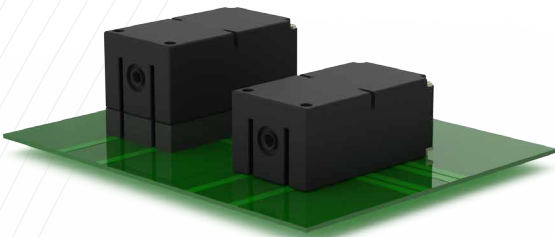

PC61 with Mounting Base and PC61 mounted on Printed Circuit Board