

Application	Interrupted	Uninterrupted
Thermal Current Rating ([/] th)	150A	200A
Intermittent Current Rating:	7	
30% Duty	275A	365A
40% Duty	235A	315A
50% Duty	210A	285A
60% Duty	195A	260A
70% Duty	180A	240A
Rated Fault Current Breaking Capac (in accordance with UL583*)		
SW184	1000A	at 48V
SW184B	1000A	at 96V
Maximum Recommended Contact Vo	oltages (U _e):	
SW184	48V D.C.	
SW184B	96V	D.C.
Typical Voltage Drop per pole across	New Contacts	at 150A:
Normally Open)mV
Mechanical Durability	_	
Coil Voltage Available (U _s)	>5 x 10 ⁶	
(Rectifier board required for A.C.) Coil Power Dissipation:	From 6 to 240V D.C.	
Highly Intermittent Rated Types	40 - 5	0 Watts
Intermittently Rated types	_	0 Watts
Prolonged Rated Types	15 - 30 Watts	
Continuously Rated Types	_	5 Watts
Maximum Pull-In Voltage (Coil at 20°		o rruno
Highly Intermittent Rated types (Max 25% Duty Cycle)	_	% U _s
Intermittently Rated types (Max 70% Duty Cycle)	60% U _s	
Prolonged Operation (Max 90% Duty Cycle)	60% U _s	
Continuously Rated Types (100% Duty Cycle)	66% U _s	
Drop-Out Voltage Range	10 - 2	25% U _s
Typical Pull-In Time (N/O Contacts to Close): Typical Drop-Out Time (N/O Contacts)ms
Without Suppression		ms
With Diode Suppression	_)ms
With Diode and Resistor (Subject to resistance value)	25ms	
Typical Contact Bounce Period	2	ms
Operating Ambient Temperature		to + 60°C
Guideline Contactor Weight:	_	
SW184	1350	0 gms
With Auxiliary	+ 40	gms
With Blowouts	+ 10	0 gms
Auxiliary D	etails	
Auxiliary Thermal Current Rating		5A
Auxiliary Contact Switching Capal	oilities (Resisti	ve Load):
SW184C		184A
5A at 24V		
2A at 48V	D.C.	
0.5A at 240	V D.C.	
Advised Connection Sizes for Max		ous Current
Copper busbar		[0.20inch ²]
Cable	Rated suitable	for Application
Key: ■ Interrupted = Uninterrupted = Uninterrupted	errupted	
Note: Where applicable values show	n are at 20°C	
* Please check our web site for produ		
Performance data provided sho Some de-rating or variation fro according to application. Thermal current ratings stated ar	m figures may	be necessary


The SW184 has been designed for direct current loads, including motors as used on electric vehicles such as industrial trucks. Developed for both interrupted and uninterrupted loads, the SW184 is suitable for switching Resistive, Capacitive and Inductive loads.


 Interrupted current - opening and closing on load with frequent switching (results in increased contact resistance).

 Uninterrupted current - no or infrequent load switching requirements (maintains a lower contact resistance).

The SW184 features single pole single throw, double breaking main contacts with silver alloy tips, which are weld resistant, hard wearing and have excellent conductivity. The SW184 has M8 stud main terminals and 6.3mm spade coil connections. It can be mounted via M5 tapped holes or mounting brackets – either supplied fitted, or as separate items. Mounting can be horizontal or vertical, when vertical the M8 contact studs should point upwards. If the requirement is for downwards orientation we can adjust the contactor to compensate for this



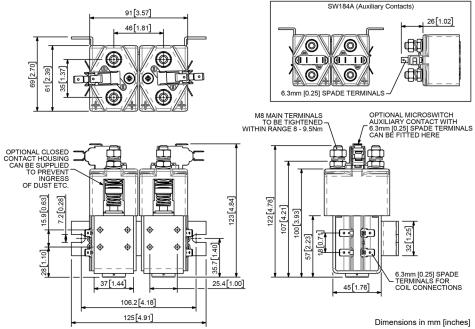

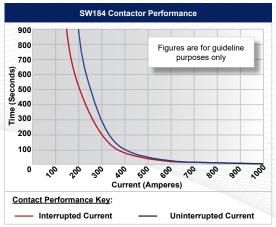

Connection Diagram			
SW184C	SW184A		
AUXILIARY CONTACT AUXILIARY CONTACT AUXILIARY CONTACT 4 2 4 4 4 2 4 4 4 6 6 6 6 6 7 7 8 8 8 8 8 8 8 8 8 8 8	AUX. CONTACTS NO N'C N'C N'O N'C N'C N'C N'O H H H H H H H H H H H H		

SW184 Available Options				
General		Suffix		
Auxiliary Contacts	0	Α		
Auxiliary Contacts - V3	0	С		
Magnetic Blowouts†	0	В		
Magnetic Blowouts - High Powered†	0	В		
Armature Cap	•			
Mounting Brackets (See Stud Contactor Series Catalogue)	•			
Magnetic Latching [†] (Not fail safe)	0	М		
Closed Contact Housing [‡]	0			
Environmentally Protected IP66	X			
EE Type (Steel Shroud)	X			
Contacts				
Large Tips	0	L		
Textured Tips	0	Т		
Silver Plating	X			
Coil				
AC Rectifier Board (Fitted)	0			
Coil Suppression [†]	0			
Flying Leads	0	F		
Manual Override Operation	X			
M4 Stud Terminals	X			
M5 Terminal Board	0			
Vacuum Impregnation	0			
Key: Optional ○ Standard • Not Available X				
† Connections become polarity sensitive				
[‡] Open Housing Available				