

The SW2400 is designed for use in telecommunication and power distribution applications where an uninterrupted load is switched. These contactors are primarily for use with Direct Current loads but can also be used with Alternating Currents.

- Uninterrupted current - no or infrequent load switching requirements (maintains a lower contact resistance).


| Application | Uninterrupted |
|--|-------------------|
| Thermal Current Rating (I_{th}) | 2400A |
| Intermittent Current Rating: | |
| 30% Duty | 4380A |
| 40% Duty | 3795A |
| 50% Duty | 3395A |
| 60% Duty | 3100A |
| 70% Duty | 2870A |
| Rated Fault Current Breaking Capacity (I_{cn}) Resistive Load*: (in accordance with UL508*) | |
| SW2400 | 3600A at 60V D.C. |

| | |
|---|------------------------------|
| Maximum Recommended Contact Voltages (U_e): | |
| SW2400 | 60V D.C. |
| Typical Voltage Drop per pole across New Contacts at 2400A | 50mV |
| Mechanical Durability | > 1 x 10 ⁶ Cycles |
| Coil Voltage Available (U_s) (Rectifier board required for A.C.) | From 6 to 240V A.C./D.C. |
| Coil Power Dissipation: | |
| Highly Intermittent Rated Types | 60 - 90 Watts |
| Intermittently Rated types | 40 - 60 Watts |
| Prolonged Rated Types | 35 - 40 Watts |
| Continuously Rated Types | 25 - 35 Watts |

| | |
|---|------------------|
| Maximum Pull-In Voltage (Coil at 20° C) Guideline: | |
| Highly Intermittently Rated Types (Max 25% Duty Cycle) | 60% U_s |
| Intermittently Rated types (Max 70% Duty Cycle) | 60% U_s |
| Prolonged Operation (Max 90% Duty Cycle) | 60% U_s |
| Continuously Rated Types (100% Duty Cycle) | 66% U_s |
| Drop-Out Voltage Range | 10 - 30% |
| Typical Pull-In Time | 90ms |
| Typical Drop-Out Time (N/O Contacts to Open): | |
| Without Suppression | 25ms |
| With Diode Suppression | 170ms |
| With Diode and Resistor (Subject to resistance value) | 170ms |
| Typical Contact Bounce Period | < 5ms |
| Operating Ambient Temperature | - 40°C to + 60°C |
| Guideline Contactor Weight: | |
| SW2400 | 6470 gms |
| With Auxiliary | + 40 gms |

| Auxiliary Details | |
|--|---------|
| Auxiliary Thermal Current Rating | 5A |
| Auxiliary Contact Switching Capabilities (Resistive Load): | |
| SW2400C | SW2400A |
| 5A at 24V D.C. | |
| 2A at 48V D.C. | |
| 0.5A at 240V D.C. | |

| Advised Connection Sizes for Maximum Continuous Current | |
|---|--|
| Copper busbar | 1500mm ² [2.33inch ²] |
| Cable | Rated suitable for Application |


Key:  = Uninterrupted

Note: Where applicable values shown are at 20° C




* Please check our web site for product UL status

- Performance data provided should be used as a guide only. Some de-rating/variation from figures may be necessary according to application.
- Thermal current ratings stated are dependant upon size of conductor used
- For further technical advice email: technical@albrightinternational.com
- Albright reserve the right to change data without prior notice

The SW2400 features double breaking main contacts with silver alloy tips which are weld resistant, hard wearing and have excellent conductivity. Silver plating on the main contacts is standard for the SW2400, however, optionally it can be excluded from the specification. This compact contactor can be busbar mounted vertically or horizontally, however if mounted vertically, the coil should be at the bottom. Optional extras include auxiliary switches, brackets, coil finishes and magnetic latching – this allows the contactor to remain closed while consuming no coil power.

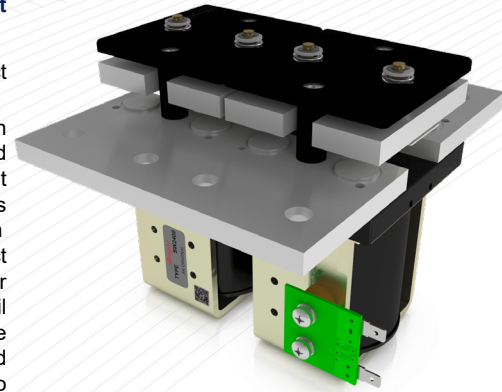

SW2400

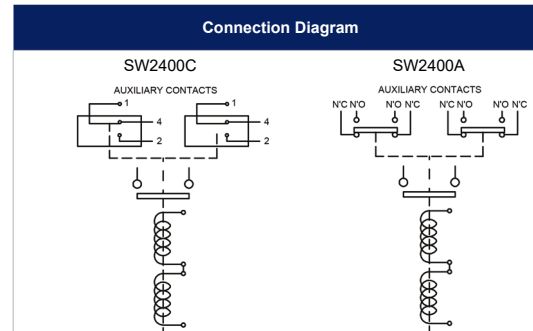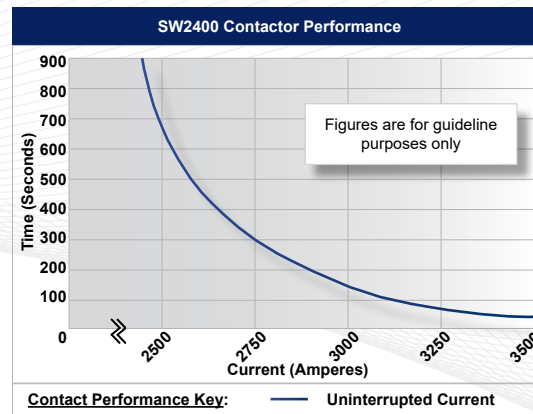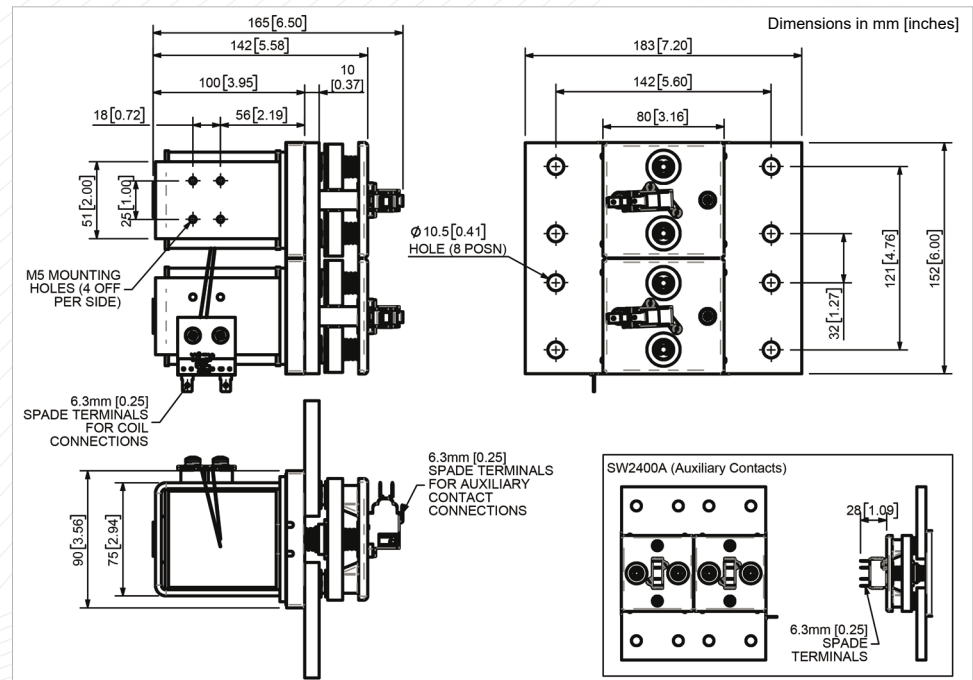

| SW2400 Available Options | | |
|--|-------------------------------------|--------|
| General | | Suffix |
| Auxiliary Contacts (as shown) | <input type="radio"/> | A |
| Auxiliary Contacts - V3 | <input type="radio"/> | C |
| Magnetic Blowouts* | <input checked="" type="checkbox"/> | |
| Magnetic Blowouts - High Powered* | <input checked="" type="checkbox"/> | |
| Armature Cap | <input checked="" type="checkbox"/> | |
| Mounting Brackets (see Busbar Series Catalogue) | <input type="radio"/> | |
| Magnetic Latching* (Not fail safe) | <input type="radio"/> | M |
| Closed Contact Housing | <input checked="" type="checkbox"/> | |
| Environmentally Protected IP66 | <input checked="" type="checkbox"/> | |
| EE Type (Steel Shroud) | <input checked="" type="checkbox"/> | |
| Contacts | | |
| Large Tips | <input checked="" type="checkbox"/> | |
| Textured Tips | <input checked="" type="checkbox"/> | |
| Silver Plating (fitted as standard) | <input type="radio"/> | |
| Coil | | |
| AC Rectifier Board (Fitted) | <input type="radio"/> | |
| Coil Suppression* | <input type="radio"/> | |
| Flying Leads | <input type="radio"/> | F |
| Manual Override Operation | <input type="radio"/> | |
| M4 Stud Terminals | <input checked="" type="checkbox"/> | |
| M5 Terminal Board | <input checked="" type="checkbox"/> | |
| Vacuum Impregnation | <input type="radio"/> | |
| Key: Optional <input type="radio"/> Standard <input checked="" type="checkbox"/> Not Available <input checked="" type="checkbox"/> | | |
| * Connections become polarity sensitive | | |