

The SU400P has been designed for direct current loads, particularly motors as used on electronic vehicles such as industrial trucks, airport tractors and such like.

- **Interrupted** current - opening and closing on load with frequent switching (results in increased contact resistance).
- **Uninterrupted** current - no or infrequent load switching requirements (maintains a lower contact resistance).

Application	Interrupted	Uninterrupted
Thermal Current Rating ( $I_{th}$ )	350A	400A
Intermittent Current Rating:		
30% Duty	635A	730A
40% Duty	550A	630A
50% Duty	495A	565A
60% Duty	450A	515A
70% Duty	420A	480A
Rated Fault Current Breaking Capacity ( $I_{cn}$ ) 5ms Time Constant: (in accordance with UL583*)		
SU400P	1500A at 48V D.C.	
SU400BP	1500A at 96V D.C.	
Rated Fault Current Breaking Capacity ( $I_{cn}$ ) Resistive Load: (in accordance with UL508*)		
SU400P	600A at 48V D.C.	
SU400BP	600A at 96V D.C.	
Maximum Recommended Contact Voltages ( $U_0$ ):		
SU400P	48V D.C.	
SU400BP	96V D.C.	
Typical Voltage Drop per pole across New Contacts at 400A	40mV	
Mechanical Durability	>3 x 10 <sup>6</sup> Cycles	
Coil Voltage Available ( $U_s$ )	From 6 to 240V A.C./D.C.	
Coil Power Dissipation:		
Highly Intermittent Rated Types	40 - 50 Watts	
Intermittently Rated types	30 - 40 Watts	
Prolonged Rated Types	15 - 30 Watts	
Continuously Rated Types	10 - 15 Watts	
Maximum Pull-In Voltage (Coil at 20° C) Guideline:		
Highly Intermittent Rated types (Max 25% Duty Cycle)	60% $U_s$	
Intermittently Rated types (Max 70% Duty Cycle)	60% $U_s$	
Prolonged Operation (Max 90% Duty Cycle)	60% $U_s$	
Continuously Rated Types (100% Duty Cycle)	66% $U_s$	
Drop-Out Voltage Range	10 - 25% $U_s$	
Typical Pull-In Time	30ms	
Typical Drop-Out Time (N/O Contacts to Open):		
Without Suppression	8ms	
With Diode Suppression	60ms	
With Diode and Resistor (Subject to resistance value)	25ms	
Typical Contact Bounce Period	3ms	
Operating Ambient Temperature	- 40°C to + 60°C	
Guideline Contactor Weight:		
SU400P	755 gms	
With Blowouts	+ 50 gms	
<b>Advised Connection Sizes for Maximum Continuous Current</b>		
Copper busbar	258mm <sup>2</sup> [0.4 inch <sup>2</sup> ]	
Cable	Rated suitable for Application	

**Key:** ■ = Interrupted ■ = Uninterrupted




**Note:** Where applicable values shown are at 20°C

\* Please check our web site for product UL status

- Performance data provided should be used as a guide only. Some de-rating or variation from figures may be necessary according to application.
- Thermal current ratings stated are dependant upon the size of conductor being used
- For further technical advice email: [technical@albrightinternational.com](mailto:technical@albrightinternational.com)
- Albright reserve the right to change data without prior notice

The contactors have double breaking main contacts with silver alloy tips, which are weld resistant, hard wearing and have excellent conductivity. The SU400P offers greater environmental protection (IP66) and is easy to install, with a range of mounting brackets available. To ensure IP66, mounting holes are not accessible. Mounting can be vertical or horizontal, when vertical the M10 contact studs should point upwards. If the requirement is for downwards orientation we can adjust the contactor to compensate for this.

**Compliant with EN1175:2020**

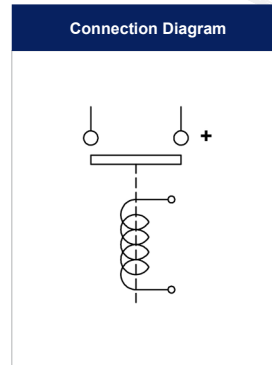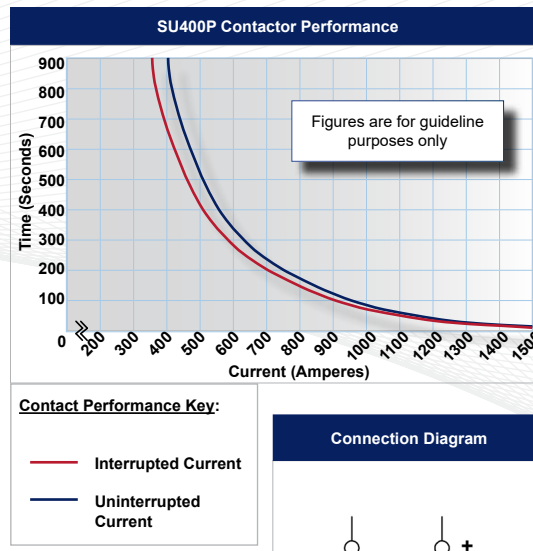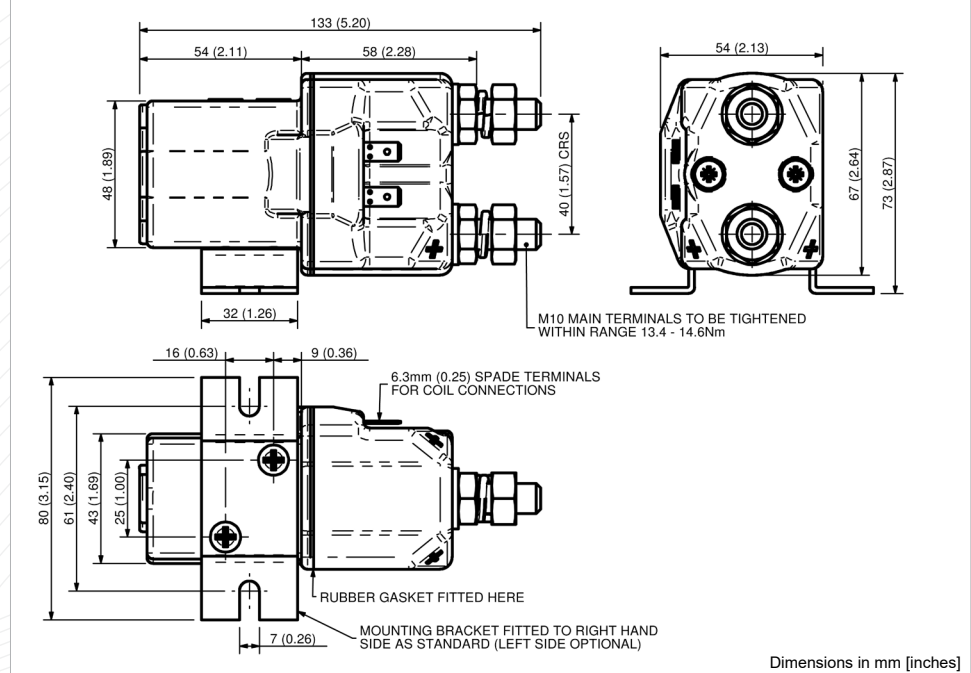

SU400P Available Options		
General		Suffix
Auxiliary Contacts	X	
Auxiliary Contacts - V3	X	
Magnetic Blowouts†	○	B
Magnetic Blowouts - High Powered†	○	B
Armature Cap	X	
Mounting Brackets (Right side fit standard, left optional)	●	
Magnetic Latching† (Not fail safe)	○	M
Closed Contact Housing	●	
Environmentally Protected IP66	●	P
EE Type (Steel Shroud)	X	
Contacts		
Large Tips	X	
Textured Tips	○	T
Silver Plating	X	
Coil		
AC Rectifier Board (Fitted)	X	
Coil Suppression†	○	
Flying Leads	X	
Manual Override Operation	X	
M4 Stud Terminals	○	
M5 Terminal Board	X	
Vacuum Impregnation	X	
<b>Key:</b> Optional ○ Standard ● Not Available X		
† Connections become polarity sensitive		