The SW1000 is designed for use in telecommunication and power distribution applications where an uninterrupted load is switched. These contactors are primarily for use with Direct Current loads but can also be used with Alternating Currents.

12008

Albright International

Uninterrupted current - no or infrequent load switching requirements (maintains lower contact resistance).

Uninterrupted current	- no or infrequent load s		
Application	Uninterrupted		
Thermal Current Rating (¹ th)	1200A		
Intermittent Current Rating:			
30% Duty	2190A		
40% Duty	1895A		
50% Duty	1695A		
60% Duty	1550A		
70% Duty	1435A		
Rated Fault Current Breaking Capa (in accordance with UL508*)			
SW1000	1800A at 60V D.C.		
Maximum Recommended Contact	.		
SW1000	60V D.C.		
Typical Voltage Drop per pole across New Contacts at 100A	<50mV		
Mechanical M.T.B.F	>1 x 10 ⁶		
Coil Voltage Available (U _S) (Rectifier board required for A.C.)	From 6 to 240V A.C./D.C.		
Coil Power Dissipation:			
Highly Intermittent Rated Types	60 - 90 Watts		
Intermittently Rated Types	40 - 60 Watts		
Prolonged Rated Types	35 - 40 Watts		
Continuously Rated Types	25 - 35 Watts		
Maximum Pull-In Voltage (Coil at 20)° C) Guideline:		
Highly Intermittent Rated types (Max 25% Duty Cycle)	60% U _S		
Intermittently Rated types (Max 70% Duty Cycle)	60% U _S		
Prolonged Operation (Max 90% Duty Cycle)	60% U _S		
Continuously Rated Types (100% Duty Cycle)	66% U _S		
Drop-Out Voltage Range	10 - 30% U _s		
Typical Pull-In Time	70ms		
Typical Drop-Out Time (N/O Contac	ts to Open):		
Without Suppression	15ms		
With Diode Suppression	100ms		
With Diode and Resistor (Subject to resistance value)	30ms		
Typical Contact Bounce Period	< 5ms		
Operating Ambient Temperature	- 40°C to + 60°C		
Guideline Contactor Weight:			
SW1000	3235 gms		
With Auxiliary	+ 20 gms		
Auxiliary			
Auxiliary Thermal Current Rating	5A		
Auxiliary Contact Switching Capa SW1000A	SW1000C		
5A at 24			
2A at 48			
0.5A at 24	_		
Advised Connection Sizes for Maximum Continuous Current			
Copper busbar	722mm ² [1.12inch ²]		
Cable	Rated suitable for Application		
Key: = Uninterrupted	, and the second se		
Note: Where applicable values sho	wn are at 20°C		
* Please check our web site for pro			


Performance data provided should be used as a guide only. from figures may be necessary according to application.

- Thermal current ratings stated are dependant upon the size of conductor being used
- For further technical advice email: technical@albrightinternational.com Albright reserve the right to change data without prior notice

The SW1000 features double breaking main contacts with silver alloy tips which are weld resistant, hard wearing and have excellent conductivity. Silver plating on the main contacts is standard for the SW1000, however, optionally it can be excluded from the specification. This compact contactor can be busbar mounted vertically or horizontally, but if mounted vertically, the coil should be at the bottom. If the coil is required at the top, we can adjust the contactor to compensate for this. Optional extras include auxiliary switches, brackets, coil finishes and magnetic latching which allows the contactor to remain closed while consuming no coil power.



SW1000

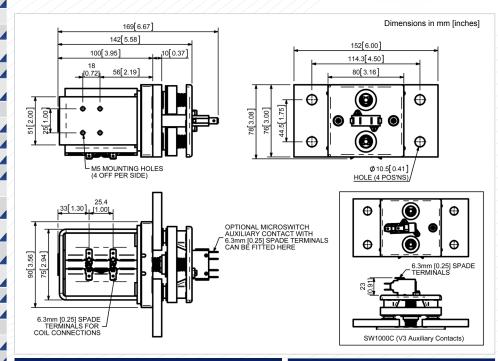

SW1000 Contactor Performance		SW1000 Available Options		
900		General		Suffix
800		Auxiliary Contacts	0	А
700	Figures are for guideline purposes only	Auxiliary Contacts - V3	0	С
		Magnetic Blowouts [†]	Х	
5 500	purposes only	Magnetic Blowouts - High Powered †	х	
9 400		Armature Cap	Х	
\$ 600 500 \$ 400 3 00		Mounting Brackets (see Busbar Series Catalogue)	0	
200		Magnetic Latching [†] (Not fail safe)	0	М
100		Closed Contact Housing	х	
		Environmentally Protected IP66	Х	
100 100	2000 2500 3000	EE Type (Steel Shroud)	х	
Curre	nt (Amperes)	Contacts		
Contact Performance Key:		Large Tips	Х	
Connection Diagram	Textured Tips	0	Т	
—— Uninterrupted	SW1000A SW1000C	Silver Plating (fitted as standard)	0	
Current		Coil		
	AUXILIARY CONTACT AUXILIARY CONTACT	AC Rectifier Board (Fitted)	0	
		Coil Suppression [†]	0	
		Flying Leads	0	F
		Manual Override Operation	0	
		M4 Stud Terminals	Х	
y. Some de-rating or variation		M5 Terminal Board	Х	

Vacuum Impregnation

0

Kev: Optional O Standard • Not Available X

[†] Connections become polarity sensitive